


AC Power Cord Specification:

Ac cable (UL) E84516 SJT 3x16AWG 60 c 300v VW-1 CSA LL110850 type SJT 3x1.31mm
16awg 60 c 300v FT2 TA NSING

One end Plugs into crate. The other end plugs into the AC Distribution Box.

AC Power Cord

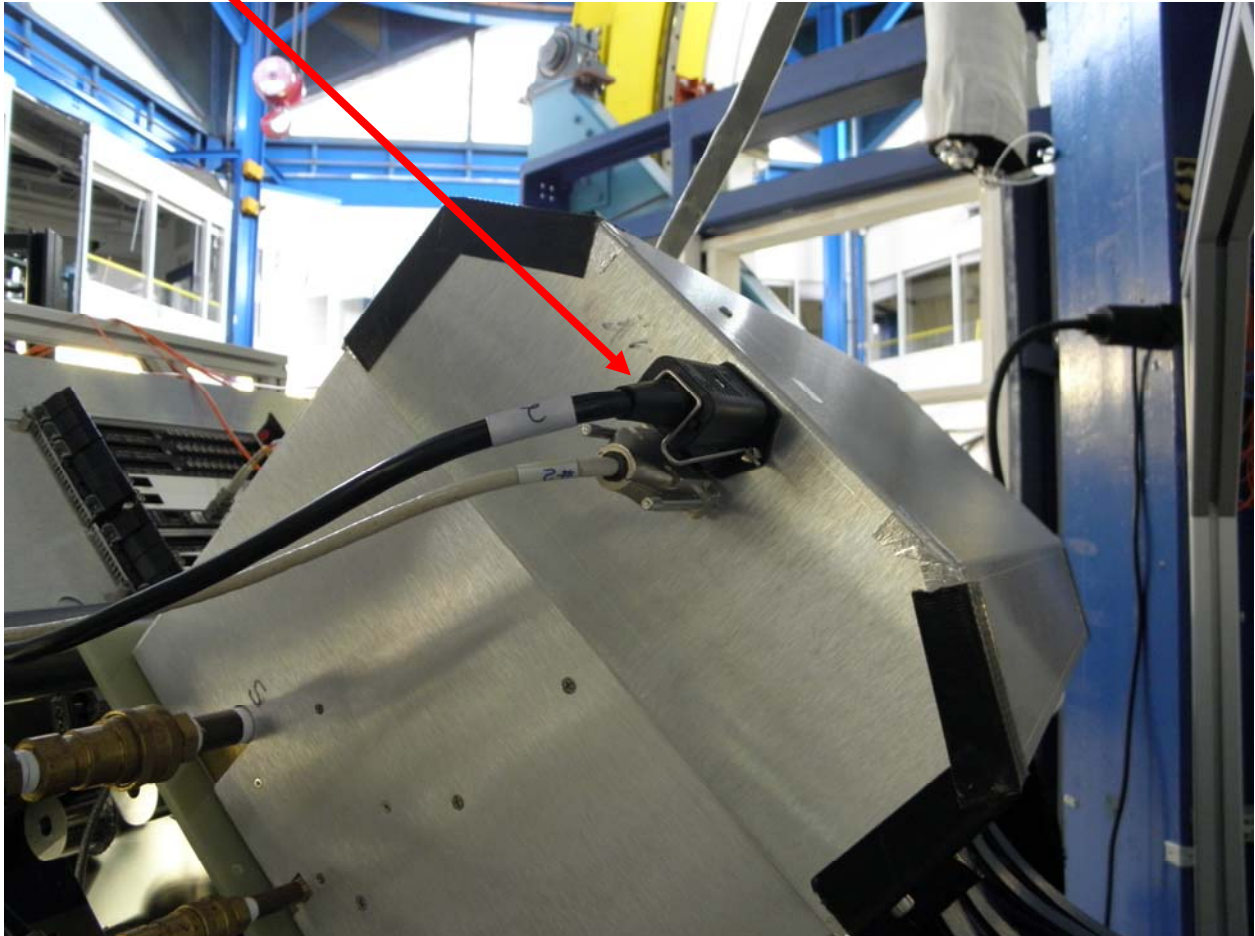

Power Entry Module w/Filter and Fuse Module (located on crate)

Schurter P/N 5220.1023.1



IEC Appliance Inlet C14 with Filter, Fuseholder 1- or 2-pole

Plug removal necessary for fuse replacement



Typ 5220, Fuseholder 2-pole
Screw-On Version

Typ 5220, Fuseholder 2-pole
Snap-In Version



Description

- Panel Mount:
- Snap-in or screw-on mounting from front side
- 3 Functions:
- Appliance Inlet Protection class I, Fuseholder for fuse-links 5 x 20 mm
- 2-pole, Line filter in standard and medical version
- Quick connect terminals 6.3 x 0.8 mm

Approvals

- VDE Certificate Number: 101307
- UL File Number: E72928

Characteristics

- All single elements are already wired
- Plug removal necessary for fuse-link replacement
- Fuse drawer meets requirements of medical standard IEC/EN 60601-1
- The fuseholder is accessible from the equipment front
- Qualified for use in equipment according IEC/EN 60950

References

Alternative: version without line filter 6220

Weblinks

pdf, html, General Product Information, Approvals, RoHS, CHINA-RoHS, Mating Connectors, e-Store, SCHURTER-Stock-Check, Distributor-Stock-Check, Accessories

Technical Data

Ratings IEC	1 - 10A @ Ta 40 °C / 250VAC; 50Hz	Appliance-Inlet/-Outlet	C14 acc. to IEC/EN 60320-1,
Ratings UL/CSA	1 - 10A @ Ta 40 °C / 125VAC; 60Hz		UL 498, CSA C22.2 no. 42 (for cold
Leakage Current	standard < 0.5mA (250V / 60Hz)		conditions) pin-temperature 70 °C, 10A,
	medical < 5 uA (250V / 60 Hz)		Protection Class 1

Fuses used in Power entry module:

Qty (2) LF T15AL250V