



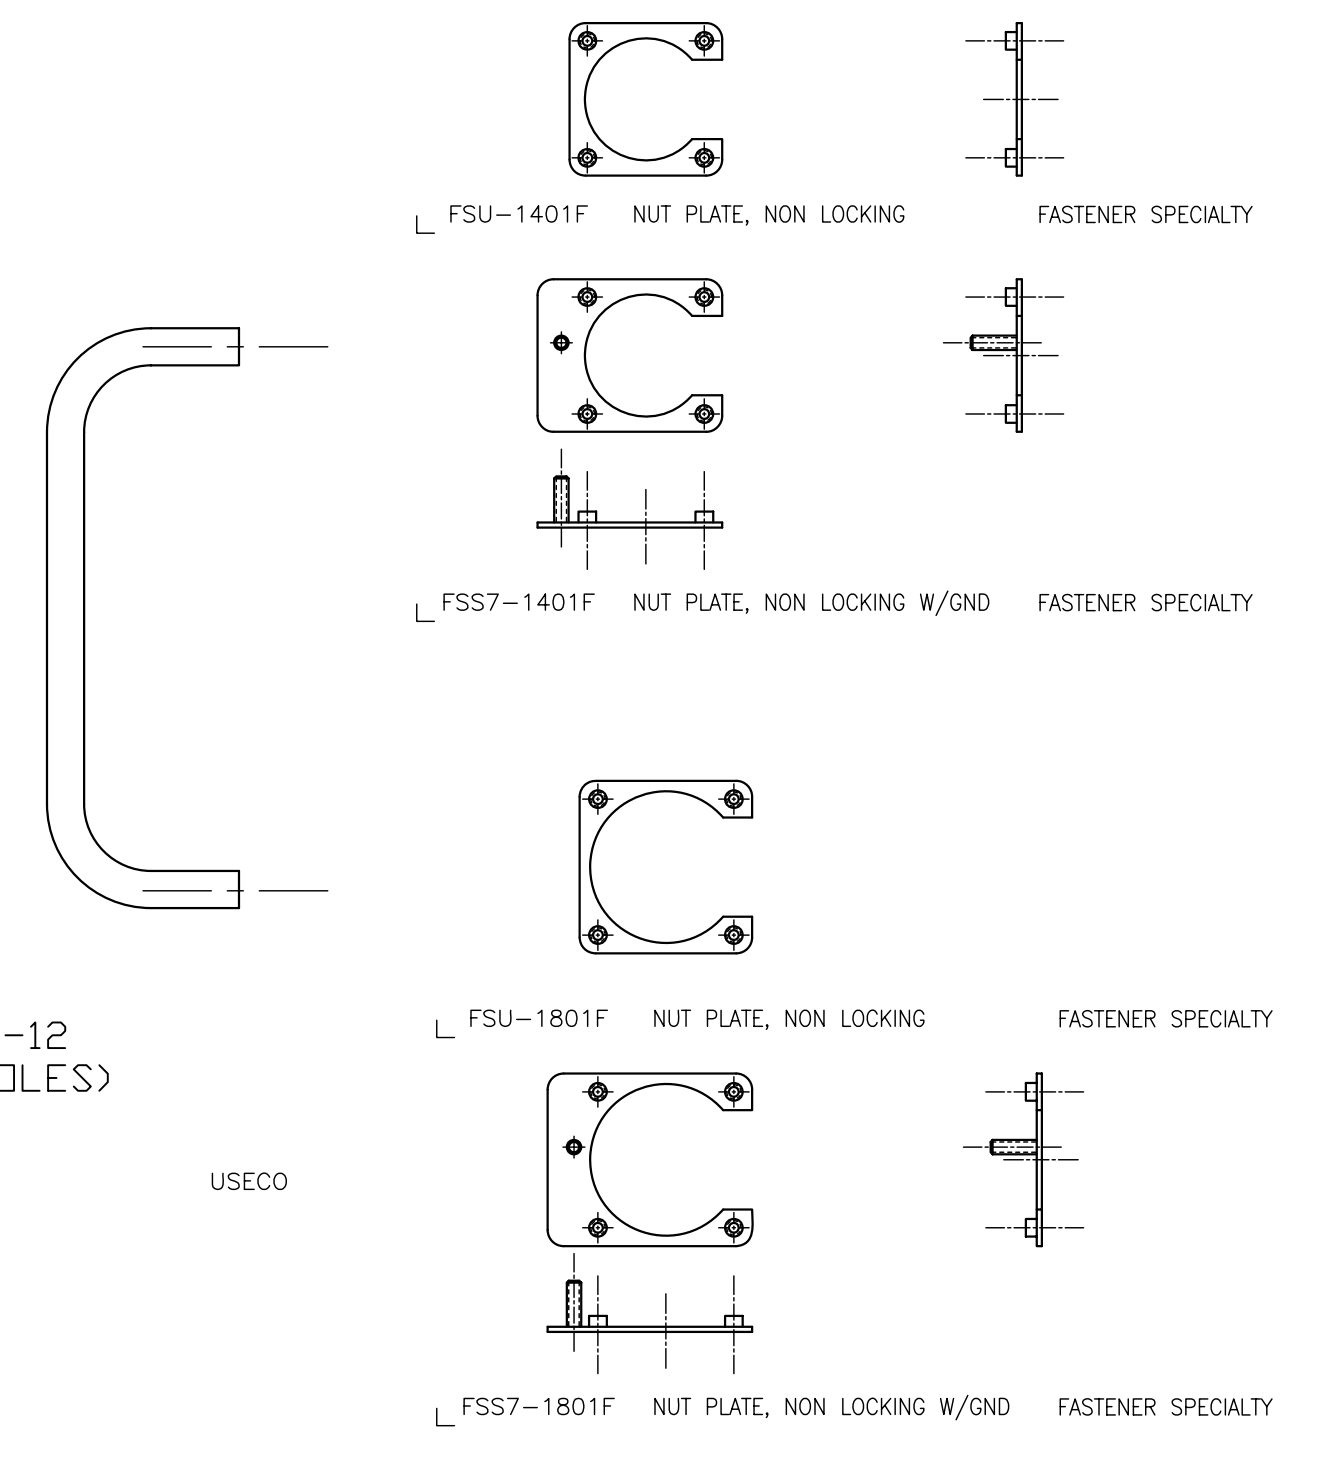

**NOTES:** UNLESS OTHERWISE SPECIFIED  
 1. REMOVE ALL BURRS AND SHARP EDGES .030 R MAX.  
 DO NOT CHAMFER EDGES OF THE HOLES  
 2. MACHINED SURFACE ROUGHNESS 125



REVISIONS						
ZONE	LTR	REVISIONS	ECR	DATE	BY	APRV
	--	INITIAL RELEASE		NOV05	PJS	PJS

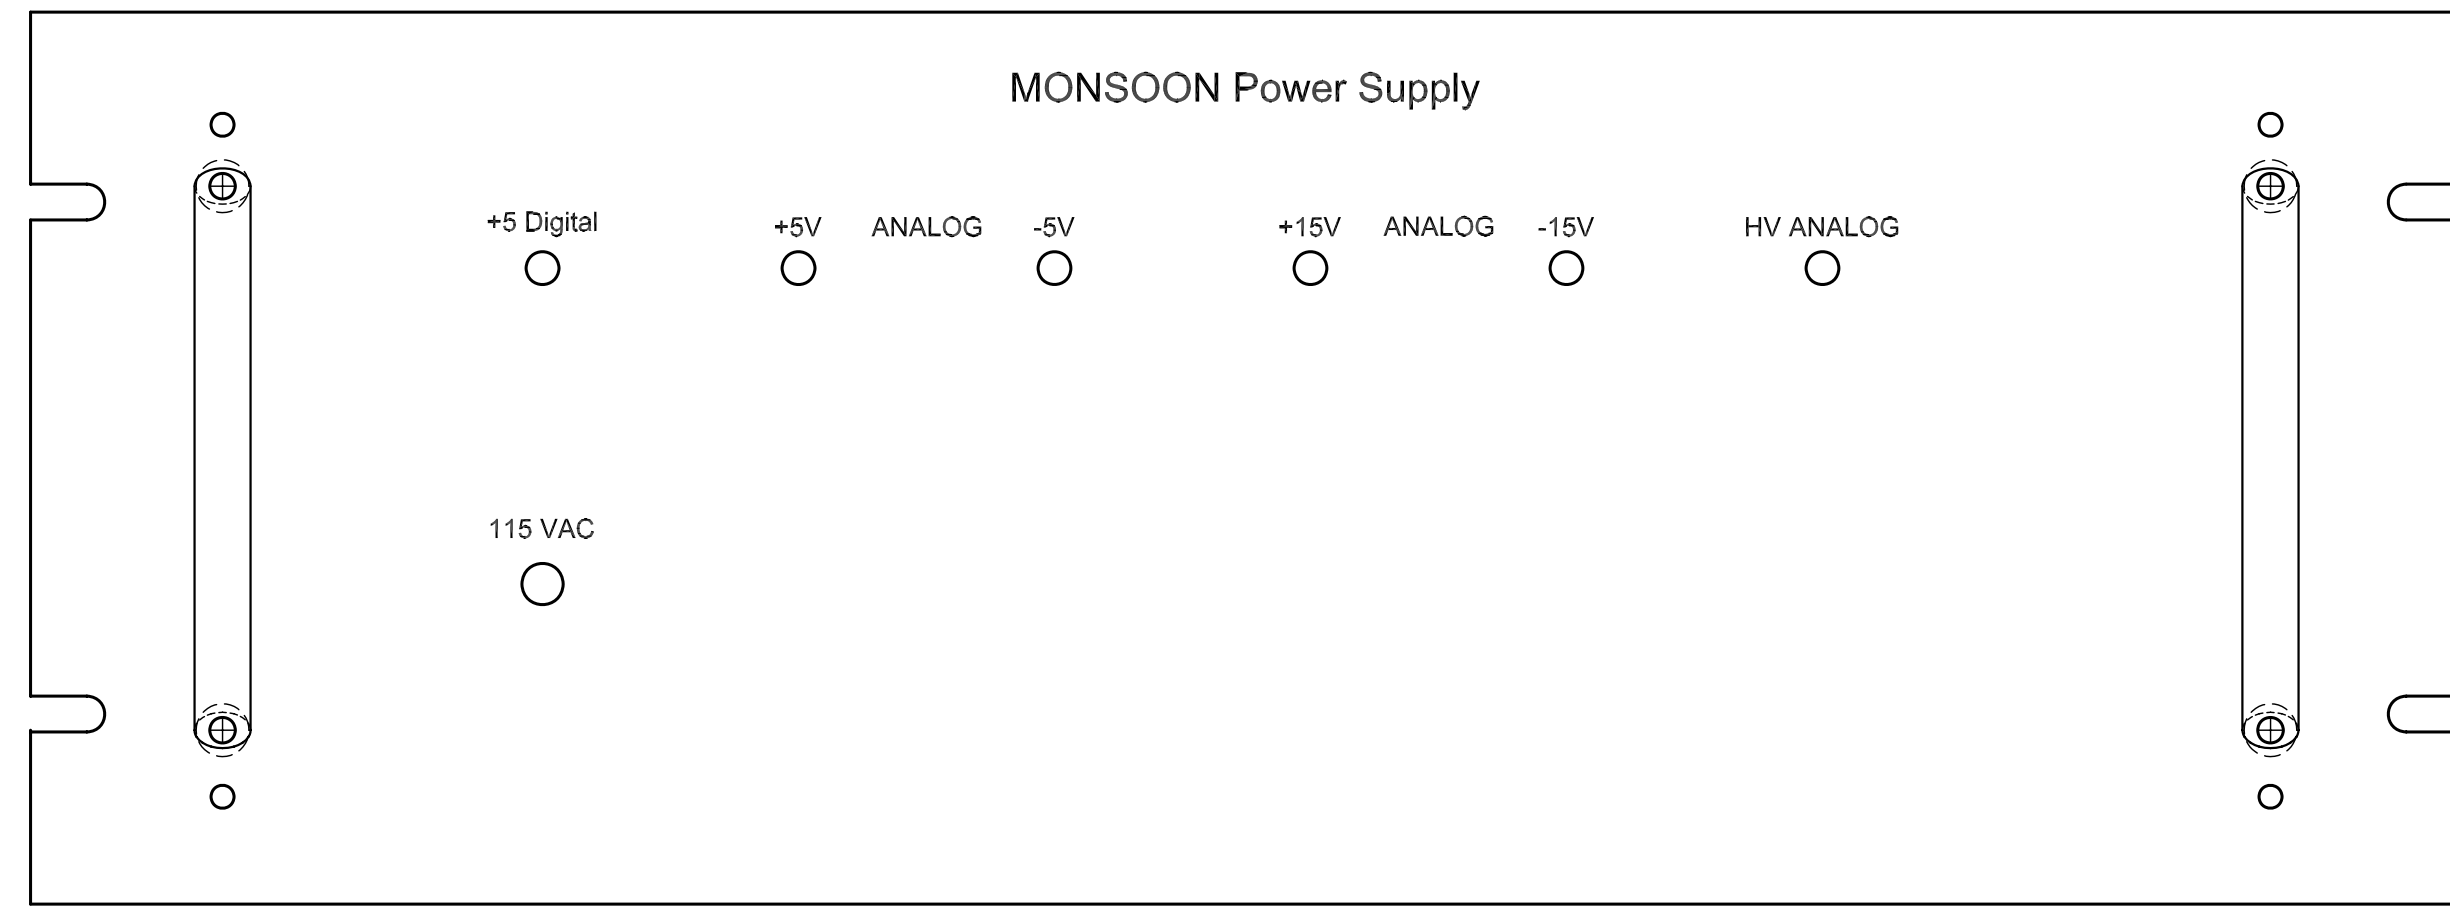

HANDLE  
 USECO #B1028-12  
 (10-32 THD HOLES)

B1028-12 HANDLE

USECO

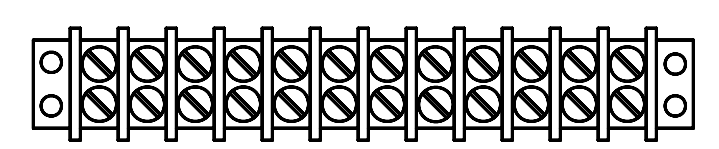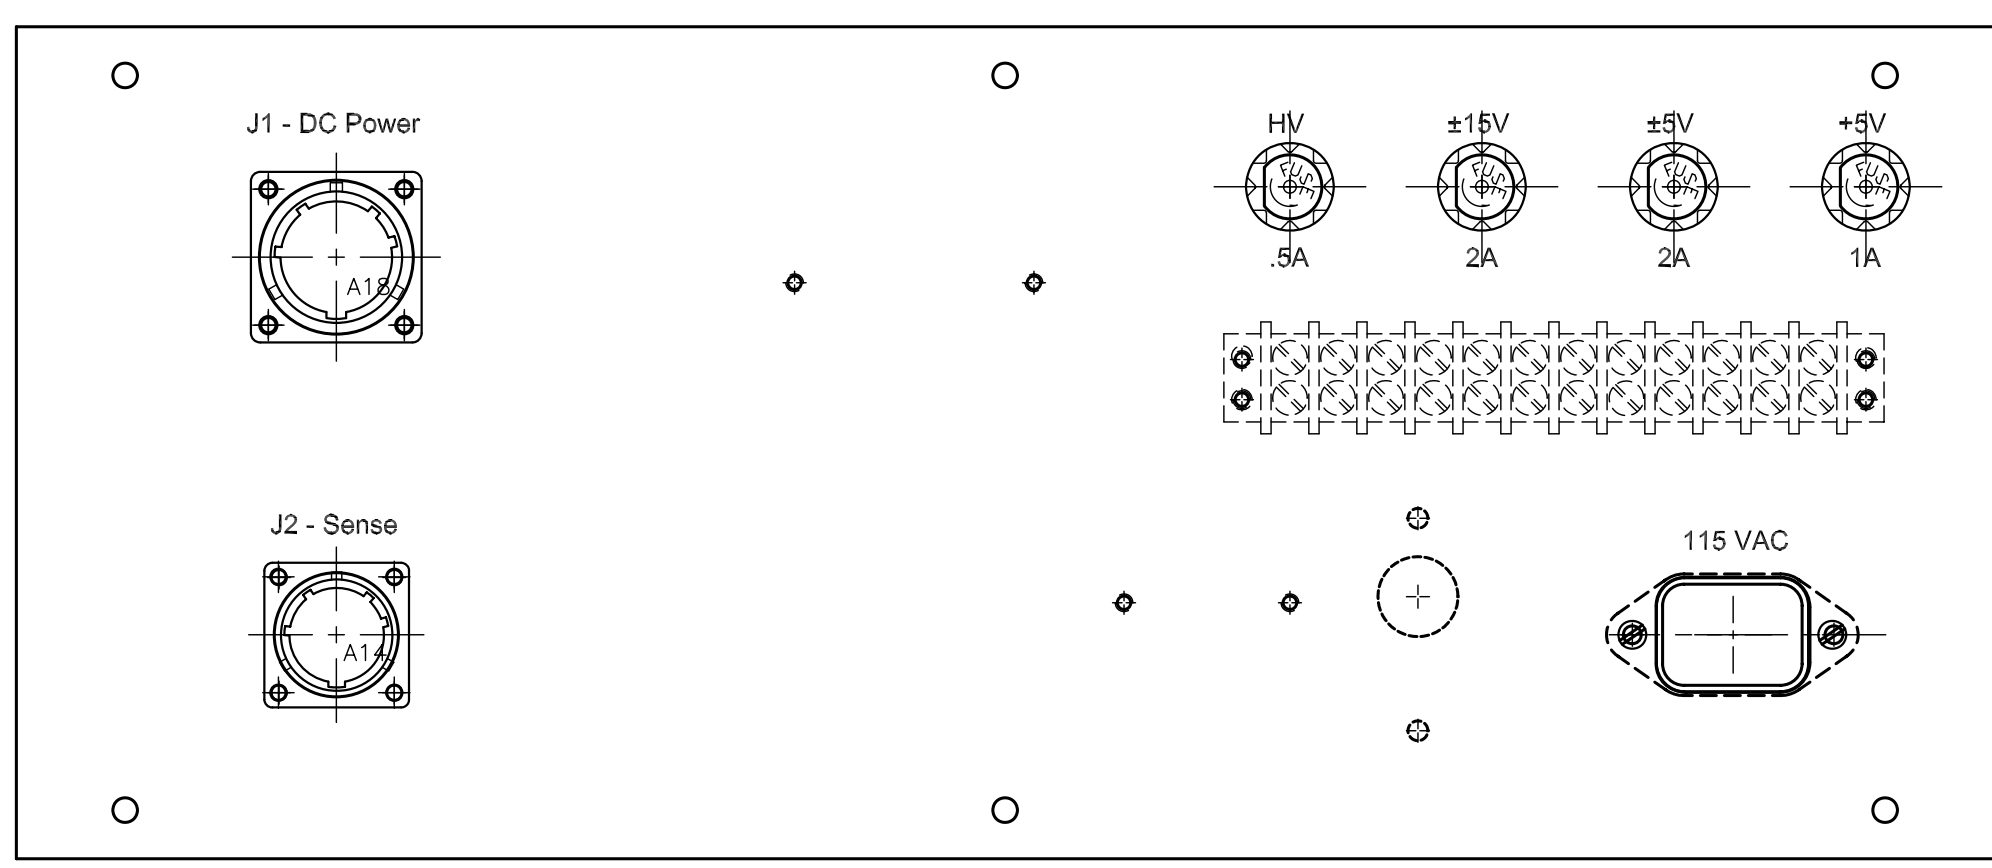

QTY. REQ.	PART OR IDENTIFYING NO.	DESCRIPTION	MATERIAL/SPECIFICATION	IDENT.	ITEM NO.
TOLERANCES UNLESS OTHERWISE NOTED .XX ±.03 ANGULAR ±.5° .XXX ±.010		THIRD ANGLE PROJECTION	<b>NATIONAL SOLAR OBSERVATORY</b> <small>OPERATED BY THE</small> <b>ASSOCIATION OF UNIVERSITIES FOR RESEARCH IN ASTRONOMY</b> <small>UNDER COOPERATIVE AGREEMENT WITH</small> <b>NATIONAL SCIENCE FOUNDATION</b>		
DO NOT SCALE DRAWING		NAME	USED ON	REF	
NEXT ASSEMBLY		<b>ASSEMBLY POWER SUPPLY CHASSIS</b>	MONSOON	REV	
SCALE: FULL		DESIGNED BY D.DRYDEN	DATE MAR05	DWG NO	
DRAWN BY D.STOVER		DATE JUL06	APPROVED BY	MNSN-EL-02-0007	
AUTOCAD LT2000		PRINT ISSUED	DATE	APPROVED BY	DATE
RELEASED				SHEET 1 OF 1	

6 5 4 3 2 1